



DESCRIPTION

- Manufactured from HDPE using the injection moulding method and 100% virgin raw material
- Compatible with EN 840-2-5-6
- Smooth surface for easy cleaning
- Resistant to UV, cold, heat, and chemicals
- Lid opener 270 degree and fixed through two metal pins
- Print area on body and lid
- Ø 200 mm wheels, 2 with breaks
- Smooth-running wheels with breaks
- Designed to accommodate data carriers
- Compatible with standard lifting equipment

EXTRA OPTIONS

- Foot pedal
- Hot Stamping
- Screen Printing
- Lid in Lid
- Liquid Evacuation System

LID AND BODY AVAILABLE COLORS





TECHNICAL FEATURES

Capacity	1100l
Length	1380 mm
Lid Length	1193 mm
Base Length	1070 mm
Width	1060 mm
Width Between Axis	490 mm
Width Between Wheels	890mm
Height	1280 mm
Height Without Lid	1180 mm
Ø Wheels	200 mm
Weight	48,80 kg
Load	440 kg



LOGISTIC DATA

20' DC	45
40' DC	90
40' HC	105
90 cbm Truck	156

LOGO APPLICATION AREAS



DIMENSIONS

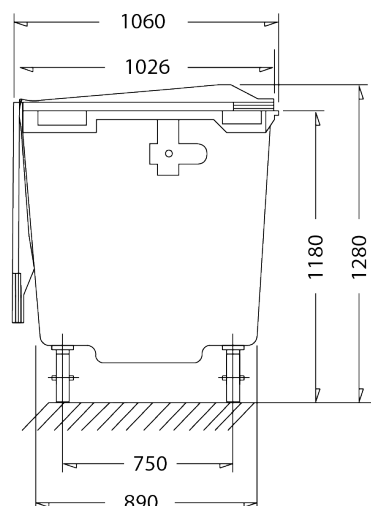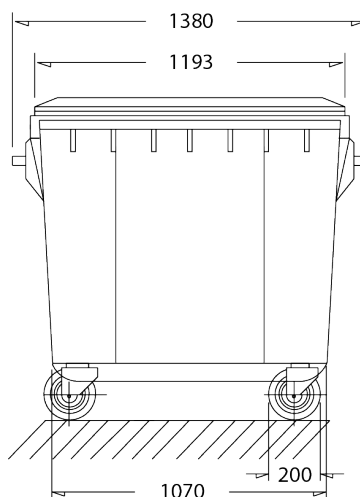

PRODUCT REFERENCES

LID AND BODY AVAILABLE COLORS



Lid and Body Standard Colors	Product Reference Without Foot Pedal	Product Reference With Foot Pedal
	011.00087	011.00131
	011.00088	011.00084
	011.00089	011.00085
	011.00090	011.00086